

SOLAR iBOOST+



Pairing the Buddy to the Solar iBoost+

This document provides guidance on pairing the Buddy to the Solar iBoost+
NB. The iBoost+ Buddy is not compatible with original Solar iBoost

*Tip: plug in and setup the Buddy in close proximity to the Solar iBoost for convenience.
When paired simply unplug and relocate it as desired.*

Please follow these instructions carefully and ensure that the unit is switched on prior to carrying out this procedure.

1. Press and hold both B and Boost buttons simultaneously on the Buddy for 5 seconds then release. (Fig 1)
2. After 5 seconds the display will show 'Install Mode 58s Unbound'. (Fig 2)
3. During the 60 second countdown move to the Solar iBoost+.
4. Press any button to switch the back light on.
5. Immediately press and hold the B on the Solar iBoost+ for 5 seconds then release. (Fig 3)
6. The Solar iBoost+ display will show 'Pairing with Device...'. (Fig 4)
7. When the pairing is successful the Solar iBoost+ will show 'Pairing Successful'. (Fig 5)
8. The Buddy will display 'Install Mode 05s Bound' The Buddy is fully paired after 5 seconds.
9. If the pairing fails the Buddy display will time out and again show 'Not Bound'.
10. Finally, locate the Buddy in a convenient position.



Fig 1

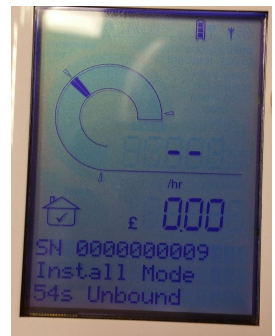


Fig 2



Fig 3

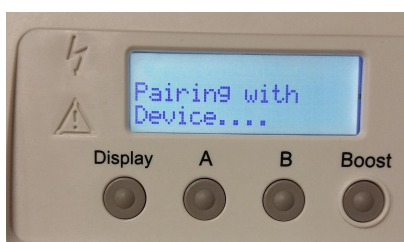


Fig 4

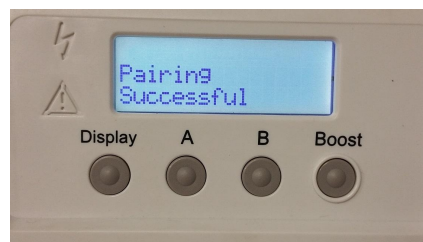


Fig 5